




Materials

Stationary
Elastomer

- Car, Sic, SSic, TC
- NBR, EPDM, Viton, PTFE

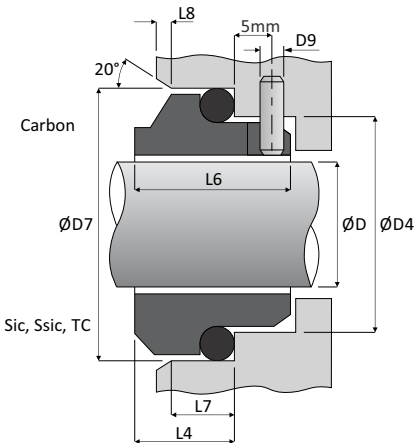

Shaft ØD	ØD7	ØD4	ØD9	L4	L8	L7	L6
10	21	17	3	10.0	1.5	4.0	17.5
12	23	19	3	10.0	1.5	4.0	17.5
14	25	21	3	10.0	1.5	4.0	17.5
16	27	23	3	10.0	1.5	4.0	17.5
18	33	27	3	11.5	2.0	5.0	19.5
20	35	29	3	11.5	2.0	5.0	19.5
22	37	31	3	11.5	2.0	5.0	19.5
24	39	33	3	11.5	2.0	5.0	19.5
25	40	34	3	11.5	2.0	5.0	19.5
28	43	37	3	11.5	2.0	5.0	19.5
30	45	39	3	11.5	2.0	5.0	19.5
32	48	42	3	11.5	2.0	5.0	19.5
33	48	42	3	11.5	2.0	5.0	19.5
35	50	44	3	11.5	2.0	5.0	19.5
38	56	49	4	14.0	2.0	5.0	22.0
40	58	51	4	14.0	2.0	5.0	22.0
43	61	54	4	14.0	2.0	6.0	22.0
45	63	56	4	14.0	2.0	6.0	22.0
48	66	59	4	14.0	2.0	6.0	22.0
50	70	62	4	15.0	2.5	6.0	23.0
53	73	65	4	15.0	2.5	6.0	23.0
55	75	67	4	15.0	2.5	6.0	23.0
58	78	70	4	15.0	2.5	6.0	23.0
60	80	72	4	15.0	2.5	6.0	23.0
63	83	75	4	15.0	2.5	6.0	23.0
65	85	77	4	15.0	2.5	6.0	23.0
68	90	81	4	18.0	2.5	6.0	26.0
70	92	83	4	18.0	2.5	6.0	26.0
75	97	88	4	18.0	2.5	7.5	26.0
80	105	95	4	18.2	2.5	7.5	26.2
85	110	100	4	18.2	3.0	7.5	26.2
90	115	105	4	18.2	3.0	7.5	26.2
95	120	110	4	17.2	3.0	7.5	26.2
100	125	115	4	17.2	3.0	7.5	25.2