


Materials

Rotary	- Car / Sic / SSic / TC
Stationary	- S/S / Sic / SSic / TC
Elastomer	- NBR / EPDM / Viton

Working Conditions

Pressure	≤ 12 bar
Speed	≤ 15 m/s
Temperature up to	180°C

*L1T = Total working length

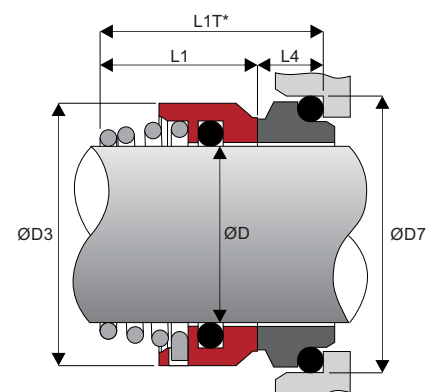

Shaft ØD Metric	ØD3	S12				S12D			
		L1T	L1	L4	ØD7	L1T	L1	L4	ØD7
10	19	20.5	15	5.5	18.1	22	15	7	21
11	20	23.5	18	5.5	20.6	-	-	-	-
12	21	23.5	18	5.5	20.6	25	18	7	23
13	23	28.0	22	6.0	23.1	-	-	-	-
14	23	28.0	22	6.0	23.1	29	22	7	25
15	24	29.0	22	7.0	26.9	-	-	-	-
16	26	30.0	23	7.0	26.9	30	23	7	27
18	29	32.0	24	8.0	30.9	34	24	10	33
19	31	33.0	25	8.0	30.9	-	-	-	-
20	31	33.0	25	8.0	30.9	35	25	10	35
21	33	33.0	25	8.0	35.4	-	-	-	-
22	33	33.0	25	8.0	35.4	35	25	10	37
23	35	35.0	27	8.0	35.4	-	-	-	-
24	35	35.0	27	8.0	35.4	37	27	10	39
25	36	35.5	27	8.5	38.2	37	27	10	40
26	36	35.5	27	8.5	38.2	-	-	-	-
28	40	38.0	29	9.0	43.3	39	29	10	43
30	43	39.0	30	9.0	43.3	40	30	10	45
32	46	39.0	30	9.0	43.3	40	30	10	48
33	46	50.5	39	11.5	53.5	49	39	10	48
34	49	50.5	39	11.5	53.5	-	-	-	-
35	49	50.5	39	11.5	53.5	49	39	10	50
36	49	50.5	39	11.5	53.5	-	-	-	-
38	53	50.5	39	11.5	60.5	55	42	13	56
40	56	50.5	39	11.5	60.5	55	42	13	58
42	59	50.5	39	11.5	60.5	-	-	-	-
43	59	50.5	39	11.5	60.5	60	47	13	61
44	61	52.5	41	11.5	65.5	-	-	-	-
45	61	52.5	41	11.5	65.5	60	47	13	63
48	64	52.5	41	11.5	65.5	60	47	13	66
50	66	56.5	45	11.5	72.5	60	46	14	70
53	69	-	-	-	-	70	56	14	73
55	71	58.5	47	11.5	72.5	70	56	14	75
58	76	-	-	-	-	70	56	14	78
60	78	60.5	49	11.5	79.3	70	56	14	80
63	81	-	-	-	-	70	56	14	83
65	84	62.5	51	11.5	84.5	80	66	14	85
68	87	-	-	-	-	80	64	16	90
70	89.7	62.5	51	11.5	89.5	80	64	16	92
75	98	68.5	57	11.5	94.5	80	64	16	97
80	100	70.5	59	11.5	99.5	90	72	18	105
85	107.5	72.5	59	13.5	105.5	90	72	18	110
90	111	75.5	62	13.5	111.5	90	72	18	115
95	119	75.5	62	13.5	116.5	90	72	18	120
100	124	88.5	75	13.5	119.5	90	72	18	125