



Materials


- Stationary - Ant Car / Car / SiC / SSiC / TC
- Rotary - SiC / SSiC / TC
- Elastomer - Graphite

Working Conditions

- Pressure ≤ 20 bar
- Speed ≤ 35 m/s
- Temperature from -75°C up to 205°C

Features

- Stationary design API682
- Floating quench
- 45° tilt on bellows
- High temperature
- Multi-flush port
- Cushioned faces

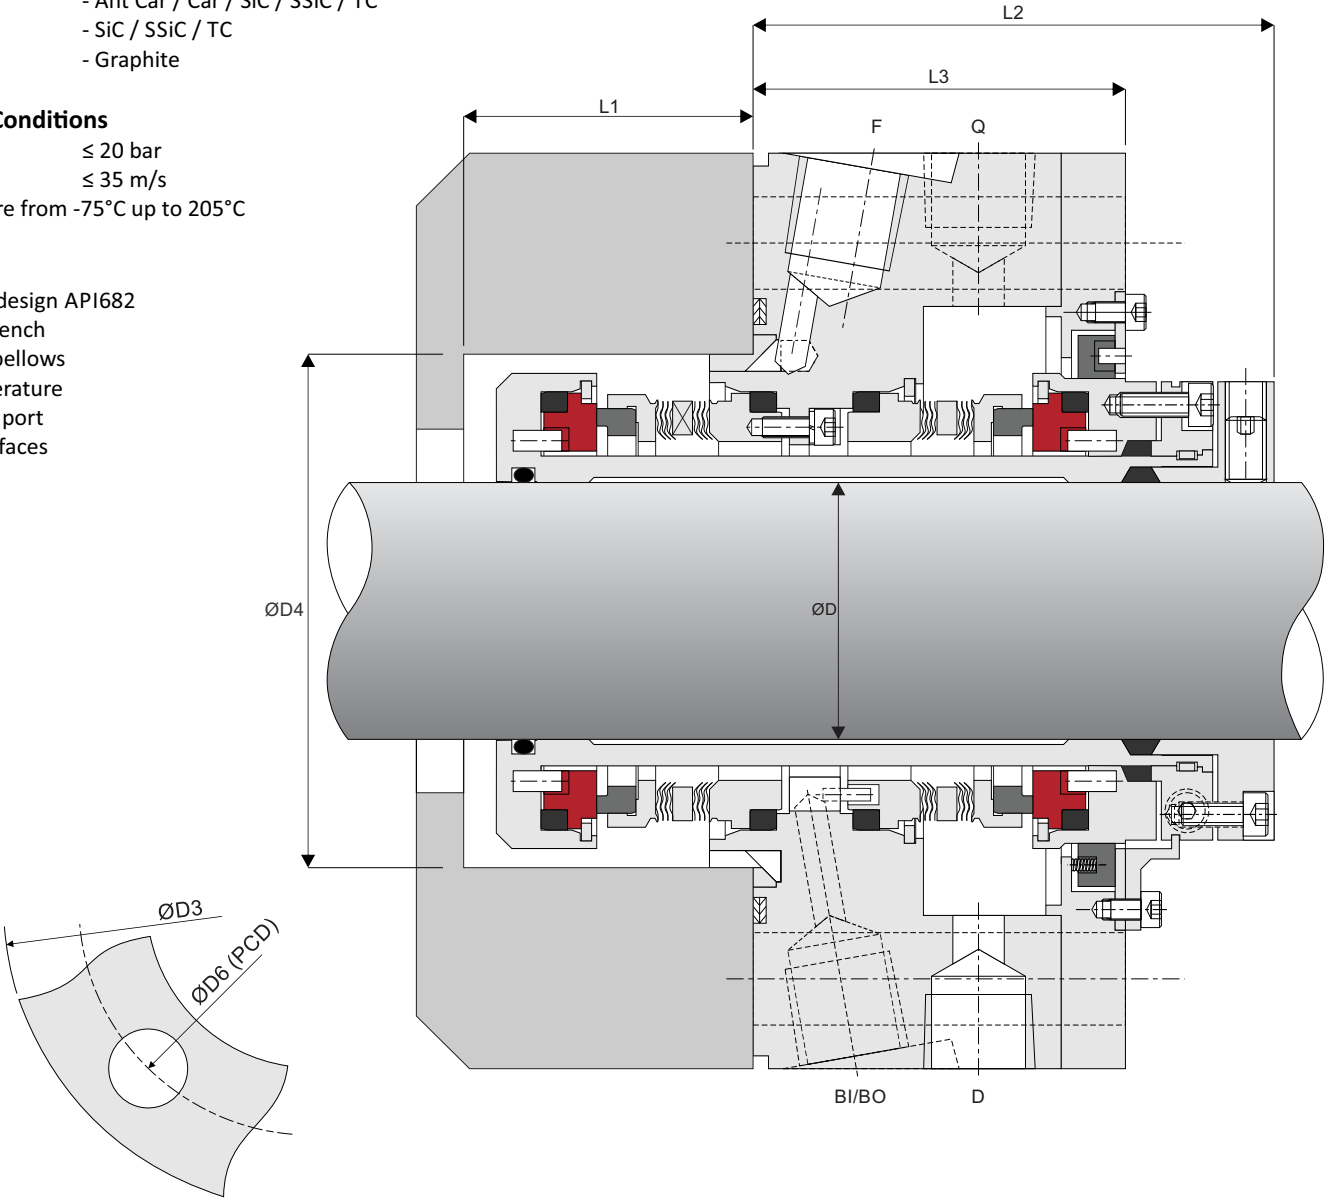

Seal Size	Shaft ØD MAX		ØD3		ØD4		STUD SIZE		ØD6 PCD		L1		L2		L3	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
1	20	(0.787)	130	(5.118)	70	(2.756)	M12x1.75	1/2"-12	105	(4.134)	45	(1.772)	98	(3.858)	66.0	(2.598)
2	30	(1.181)	140	(5.512)	80	(3.150)	M12x1.75	1/2"-13	115	(4.528)	52	(2.047)	98	(3.858)	66.0	(2.598)
3	40	(1.575)	150	(5.906)	90	(3.543)	M12x1.75	1/2"-13	125	(4.921)	57	(2.244)	98	(3.858)	66.0	(2.598)
4	50	(1.969)	175	(6.890)	100	(3.937)	M16x2.0	5/8"-11	140	(5.512)	52	(2.047)	108	(4.252)	73.0	(2.874)
5	60	(2.362)	195	(7.677)	120	(4.724)	M16x2.0	5/8"-11	160	(6.299)	57	(2.244)	108	(4.252)	80.0	(3.150)
6	70	(2.756)	205	(8.071)	130	(5.118)	M16x2.0	5/8"-11	170	(6.693)	62	(2.441)	108	(4.252)	80.0	(3.150)
7	80	(3.150)	215	(8.465)	140	(5.512)	M16x2.0	5/8"-11	180	(7.087)	67	(2.638)	108	(4.252)	80.0	(3.150)
8	90	(3.543)	245	(9.646)	160	(6.299)	M20x2.5	3/4"-10	205	(8.071)	62	(2.441)	119	(4.685)	90.0	(3.543)
9	100	(3.937)	255	(10.039)	170	(6.693)	M20x2.5	3/4"-10	215	(8.465)	67	(2.638)	119	(4.685)	90.0	(3.543)
10	110	(4.331)	265	(10.433)	180	(7.087)	M20x2.5	3/4"-10	225	(8.858)	72	(2.835)	119	(4.685)	90.0	(3.543)