

Materials

Stationary	- Car / SiC / SSiC / TC
Rotary	- SiC / SSiC / TC
Elastomer	- Aflas / EPDM / FFKM / Viton



Working Conditions

Pressure	< 28 bar
Speed	< 35 m/s
Temperature up to	205°C*


*Material Dependant

Features:

Stationary Design
Monolithic Faces
Cushioned Faces
Pressure Balanced
Springs outside the media

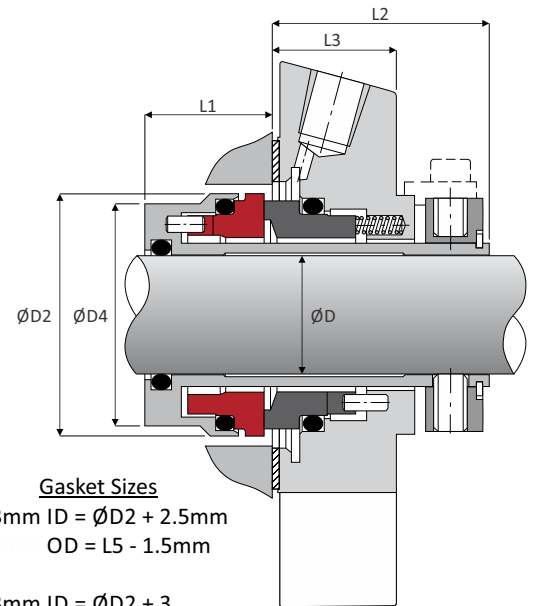

Shaft Ø		ØD2	ØD3	ØD4	ØD5	L1	L2	L3	L5
Inches	Metric								
1.000"	24	43,5	104	40,1	12,5	19,0	38,0	21,5	62
	25	43,5	104	40,1	12,5	19,0	38,0	21,5	62
1.125"	28	46,5	104	43,1	12,5	19,0	38,0	21,5	62
-	30	48,5	104	45,1	12,5	19,0	38,0	21,5	65
1.250"	32	50,0	104	47,1	12,5	19,0	38,0	21,5	67
	33	50,0	104	47,1	12,5	19,0	38,0	21,5	67
1.375"	35	53,5	110	50,1	12,5	19,0	38,0	21,5	70
1.500"	38	56,5	125	53,1	14,7	19,0	38,0	21,5	75
-	40	58,5	125	55,1	14,7	19,0	38,0	21,5	75
1.625"	-	60,5	133	57,1	14,7	19,0	38,0	21,5	80
-	43	61,5	133	58,1	14,7	19,0	38,0	21,5	80
1.750"	45	63,5	140	60,1	14,7	19,0	38,0	21,5	81
1.875"	48	66,5	140	63,1	14,7	19,0	38,0	21,5	84
2.000"	50	68,5	140	65,1	14,7	19,0	38,0	21,5	87
2.125"	53	71,5	150	68,1	17,5	19,0	38,0	21,5	90
-	55	73,5	150	70,1	17,5	19,0	38,0	21,5	92
2.250"	-	76,5	160	73,1	17,5	19,0	38,0	21,5	95
2.375"	60	78,5	160	75,1	17,5	19,0	38,0	21,5	100
2.500"	-	81,5	170	78,1	17,5	19,0	38,0	21,5	103
-	65	83,5	165	80,1	17,5	19,0	38,0	21,5	105
2.625"	-	86,5	180	83,1	17,5	19,0	38,0	21,5	110
2.750"	70	88,5	180	85,1	17,5	19,0	40,0	21,5	120
2.875"	-	98,0	190	98,0	17,5	20,5	43,5	24,0	123
3.000"	75	100,0	190	100,0	17,5	20,5	43,5	24,0	125
3.125"	-	105,0	190	105,0	17,5	20,5	43,5	24,0	130
-	80	105,0	190	105,0	17,5	20,5	43,5	24,0	130
3.250"	-	108,0	220	108,0	17,5	20,5	43,5	24,0	133
3.375"	85	110,0	220	110,0	21,5	20,5	43,5	24,0	135
3.500"	90	115,0	220	115,0	21,5	20,5	43,5	24,0	140
3.625"	-	117,0	220	117,0	21,5	20,5	43,5	24,0	142
3.750"	95	120,0	220	120,0	21,5	20,5	43,5	24,0	145
3.875"	100	125,0	220	125,0	21,5	20,5	43,5	24,0	145
4.000"		125,0	220	125,0	21,5	20,5	43,5	24,0	150
4.125"	105	130,0	240	130,0	21,5	20,5	45,5	30,0	170
4.250"	110	135,0	240	135,0	21,5	20,5	45,5	30,0	170
4.375"	110	135,0	240	135,0	21,5	20,5	45,5	30,0	170
4.500"	115	140,0	250	140,0	21,5	20,5	45,5	30,0	180
4.625"	120	145,0	250	145,0	21,5	20,5	45,5	30,0	180
4.750"	120	145,0	250	145,0	21,5	20,5	45,5	30,0	180
4.875"	125	150,0	250	150,0	21,5	20,5	45,5	30,0	180
5.000"	130	155,0	260	155,0	21,5	20,5	45,5	30,0	190

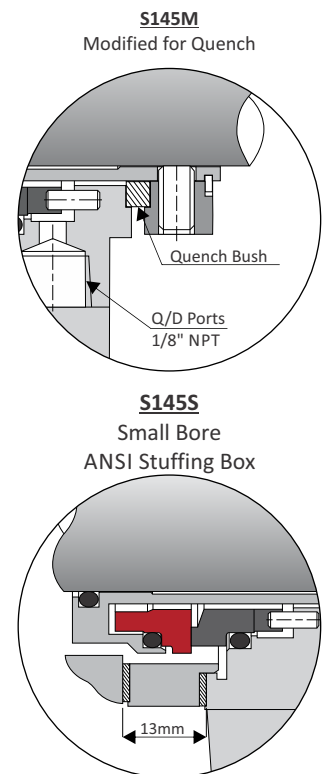

Materials

Stationary	- Car / Sic / SSic / TC
Rotary	- Sic / SSic / TC
Elastomer	- Aflas / EPDM / FFKM / Viton


Working Conditions

Pressure	< 28 bar
Speed	< 35 m/s
Temperature up to	205°C*

*Material Dependant

Features:


Stationary Design
Monolithic Faces
Cushioned Faces
Pressure Balanced
Springs outside the media

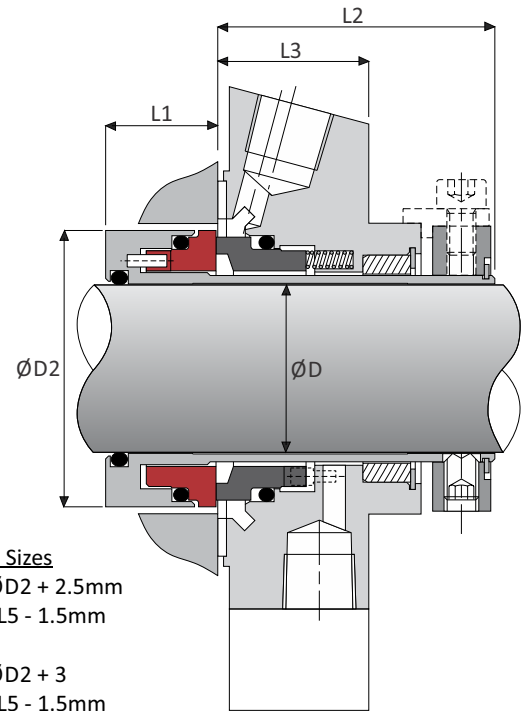

Gasket Sizes


<73mm ID = ØD2 + 2.5mm
OD = L5 - 1.5mm

≥73mm ID = ØD2 + 3
OD = L5 - 1.5mm



Shaft ØD		ØD2	ØD3	ØD5	L1	L2	L3	L5
Inches	Metric							
1.000"	24	43,5	104	12,5	19,0	45,0	21,5	62
	25	43,5	104	12,5	19,0	45,0	21,5	62
1.125"	28	46,5	104	12,5	19,0	45,0	21,5	62
	30	48,5	104	12,5	19,0	45,0	21,5	65
1.250"	32	50,0	104	12,5	19,0	45,0	21,5	67
	33	50,0	104	12,5	19,0	45,0	21,5	67
1.375"	35	53,5	110	12,5	19,0	45,0	21,5	70
1.500"	38	56,5	125	14,7	19,0	45,0	21,5	75
	40	58,5	125	14,7	19,0	45,0	21,5	75
1.625"	-	60,5	133	14,7	19,0	45,0	21,5	80
	43	61,5	133	14,7	19,0	45,0	21,5	80
1.750"	45	63,5	140	14,7	19,0	45,0	21,5	81
1.875"	48	66,5	140	14,7	19,0	45,0	21,5	84
2.000"	50	68,5	140	14,7	19,0	45,0	21,5	87
2.125"	53	71,5	150	17,5	19,0	45,0	21,5	90
	55	73,5	150	17,5	19,0	45,0	21,5	92
2.250"	-	76,5	160	17,5	19,0	45,0	21,5	95
2.375"	60	78,5	160	17,5	19,0	45,0	21,5	100
2.500"	-	81,5	170	17,5	19,0	45,0	21,5	103
	65	83,5	165	17,5	19,0	45,0	21,5	105
2.625"	-	86,5	180	17,5	19,0	45,0	21,5	110
2.750"	70	88,5	180	17,5	19,0	47,0	21,5	120
2.875"	-	98,0	190	17,5	20,5	50,5	24,0	123
3.000"	75	100,0	190	17,5	20,5	50,5	24,0	125
	-	105,0	190	17,5	20,5	50,5	24,0	130
3.125"	-	105,0	190	17,5	20,5	50,5	24,0	130
	80	105,0	190	17,5	20,5	50,5	24,0	130
3.250"	-	108,0	220	17,5	20,5	50,5	24,0	133
3.375"	85	110,0	220	21,5	20,5	50,5	24,0	135
3.500"	90	115,0	220	21,5	20,5	50,5	24,0	140
3.625"	-	117,0	220	21,5	20,5	50,5	24,0	142
3.750"	95	120,0	220	21,5	20,5	50,5	24,0	145
3.875"	-	125,0	220	21,5	20,5	50,5	24,0	145
	100	125,0	220	21,5	20,5	50,5	24,0	150
4.000"	-	130,0	240	21,5	20,5	52,5	30,0	170
4.125"	105	130,0	240	21,5	20,5	52,5	30,0	170
4.250"	110	135,0	240	21,5	20,5	52,5	30,0	170
4.375"	110	135,0	240	21,5	20,5	52,5	30,0	170
4.500"	115	140,0	250	21,5	20,5	52,5	30,0	180
4.625"	120	145,0	250	21,5	20,5	52,5	30,0	180
4.750"	120	145,0	250	21,5	20,5	52,5	30,0	180
4.875"	125	150,0	250	21,5	20,5	52,5	30,0	180
5.000"	130	155,0	260	21,5	20,5	52,5	30,0	190

S145W Water Quench



S145R Carbon Restriction Bush

